


Key-Code counter-flow heat exchanger

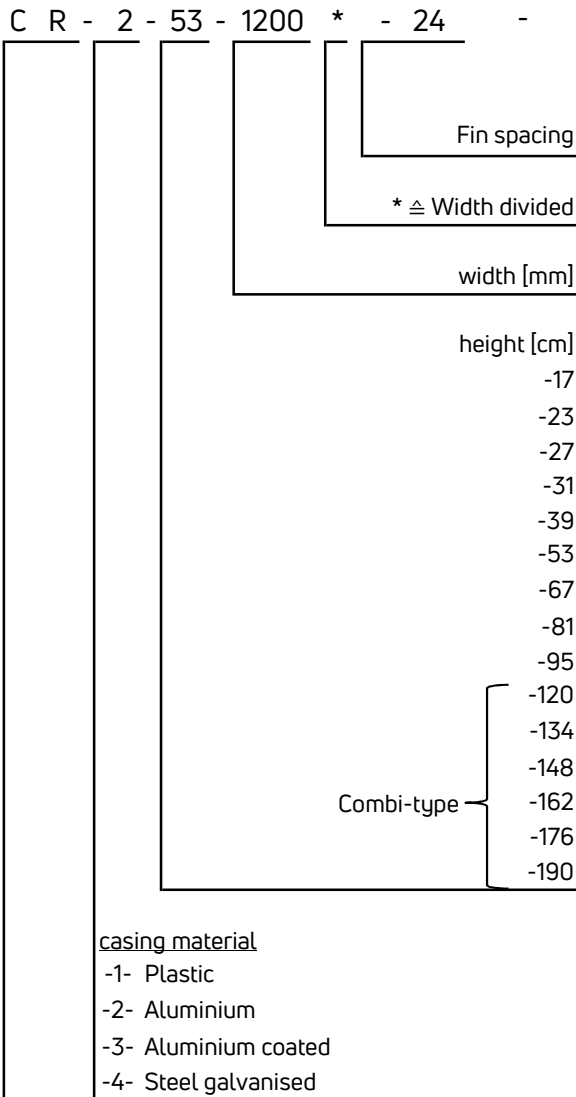

B M B L 120	
Shaft position / Shaft typ	B M B L 120
A - external shaft - Bypass side B - external shaft - Packet side	
D - internal shaft; damper-blade horizontal E - internal shaft; damper-blade vertical	
Shaft drive	B M B L 120
A - squared 12 x 12mm - length: 60mm B - squared 12 x 12mm - length: 100mm C - squared 12 x 12mm - length: 150mm M - round 16mm - length 100mm	
Damper material	B M B L 120
B - Alu V - Alu coated	
Typ of bypass	B M B L 120
C - Bypass Position central L - Bypass Position A R - Bypass Position B 00BZ - without Damper; Bypass Position central 00BK - without Damper; Bypass Position A 00BF - without Damper; Bypass Position B	
120 - Bypass width [mm]	B M B L 120

- CV- Enthalpy counter-flow heat exchanger
- CK- Plastic counter-flow heat exchanger
- CR- Aluminium counter-flow heat exchanger
- CB- Aluminium-epoxy counter-flow heat exchanger

Typ of bypass

